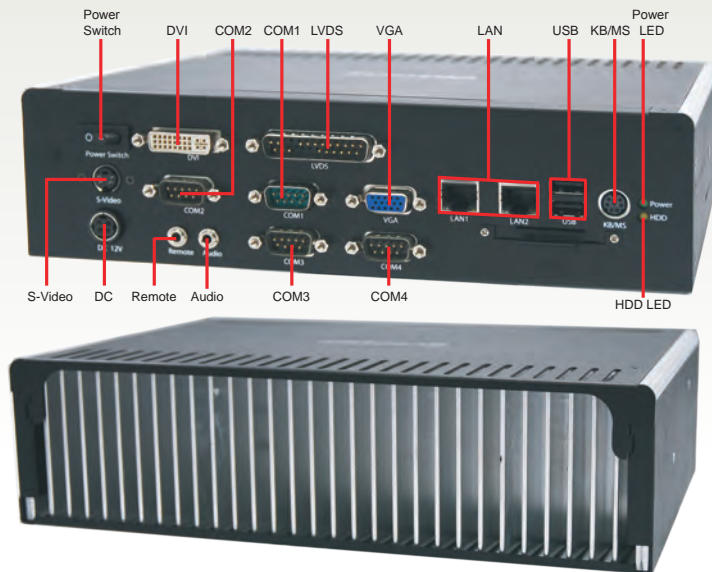


## AR-ES5630FL

Fanless and Dustproof Intel GME965 Core 2 Duo  
Embedded System

## Features

- ✓ Intel GME965 + ICH8M
- ✓ Support Core 2 Duo/Celeron M
- ✓ VGA/DVI/LVDS/TV-Out
- ✓ Dual Giga LAN
- ✓ PCI-104 Interface
- ✓ Anti-Shock 2.5" HDD Mounting Kit
- ✓ COM, USB2.0, GPIO, SATA II, IDE, CFII, Audio

## Specification

## System

<b>CPU</b>	Socket P support Intel Core 2 Duo/Celeron M
<b>Chipset</b>	Intel GME965 + Intel ICH8M
<b>Front Side Bus</b>	533/800MHz
<b>Memory</b>	<ul style="list-style-type: none"> <li>• 1 x 200-pin SO-DIMM socket support 400/533/667MHz DDR2 SDRAM up to 2GB</li> <li>• 1GB pre-installed</li> </ul>

## Video

<b>Graphic Controller</b>	Intel GME965 integrated GMA X3100 graphic controller
<b>Video Memory</b>	DVMT 4.0, Maximum 384MB shared.
<b>Video Interface</b>	<ul style="list-style-type: none"> <li>• 1 x VGA port (DB15)</li> <li>• 1 x DVI port</li> <li>• 1 x Dual Channel 24-bit LVDS port</li> <li>• 1 x TV-Out (S-Video)</li> </ul>

## Storage

<b>IDE</b>	1 x E-IDE (44-pin)
<b>SATA</b>	1 x SATA II port
<b>CF</b>	1 x External Compact Flash Type I/II slot (support UDMA)
<b>Disk Bay</b>	1 x Anti-shock 2.5" HDD/SSD bracket

## Communication

<b>Ethernet</b>	2 x Gbps RJ45 with LED, Broadcom BCM5787
<b>USB</b>	4 x USB2.0 (2 x external port, 2 x pin header)
<b>Serial Port</b>	<ul style="list-style-type: none"> <li>• 1 x RS-232/422/485 (DB9) (jumper-selectable)</li> <li>• 3 x RS-232 (DB9)</li> <li>• Automatic RS-485 data flow control</li> </ul>

## Expansion

<b>PCI Slot</b>	1 x PCI-104
<b>PCI Express Slot</b>	-
<b>miniPCIe</b>	-

## Other Feature

<b>PS/2</b>	1 x PS/2
<b>Audio</b>	Line -Out
<b>Hardware</b>	<ul style="list-style-type: none"> <li>• CPU voltage</li> </ul>
<b>Monitoring</b>	<ul style="list-style-type: none"> <li>• CPU and system temperature</li> </ul>
<b>WatchDog Timer</b>	Software programmable 1~255 sec.
<b>Indicator</b>	HDD and Power LED
<b>GPIO</b>	8-bit Digital I/O

## Power Requirement

<b>Power Input</b>	12 (+/-5%) VDC, Lockable DC jack
<b>Power Adaptor</b>	100~240VAC, 96W power adaptor
<b>Power Consumption</b>	59.6W without external devices

## Software

<b>OS Support</b>	Windows Vista/XP/XP Embedded/CE, Linux
-------------------	--

## Mechanical &amp; Environment

<b>Thermal Design</b>	Fanless
<b>Chassis Material</b>	Aluminum
<b>Dimension (W x D x H)</b>	251mm x 165mm x 67mm (9.89" x 6.50" x 2.64")
<b>Weight</b>	Net: 2.0kg (4.5Lb), Gross: 4.5kg (10Lb)
<b>Operating Temp.</b>	0~50°C (32~122°F)
<b>Storage Temp.</b>	-20~70°C (-4~158°F)
<b>Relative Humidity</b>	0 to 90% @ 40°C, non-condensing
<b>Safety</b>	CE, FCC class A

## Packing List

- 1 x AR-ES5630FL
- 1 x Quick user guide
- 1 x Utility CD
- 1GB memory pre-installed
- 1 x 2.5" anti-shock HDD mounting kit
- 1 x HDD cable (44-pin)
- 1 x PS/2 cable
- 1 x 96W power adapter
- 1 x AC power cord (Optional for USA/EU/UK type)
- 2 x Mounting bracket
- 2 x Screw pack

## Ordering Information

<b>AR-ES5630FLT75</b>	AR-ES5630FL with Intel Core 2 Duo T7500 2.20GHz, 1GB DDR2 and 96W AC/DC power adapter
<b>AR-ES5630FLCM55</b>	AR-ES5630FL with Intel Celeron 550 2.0GHz, 1GB DDR2 and 96W AC/DC power adapter

## UNITRONIX Pty Ltd

PO Box 486, Morisset NSW 2264  
 NSW: Tel: 61 2 4977 3511 Fax: 61 2 4977 3522  
 WA: Tel: 61 8 9455 2424 Fax: 61 8 9455 2458  
 unitsyd@unitronix.com.au www.unitronix.com.au