

HB-2010M 4U Rackmount 13-Slots Industrial Computer



Features :

- 4U height, 19" Rackmount
- High-Density Steel Enclosure with high temperature surface handling process
- Special HDD Vibration Absorb with dual protection and shock absorber
- Built-in Intel®Core™2 Duo E4600 2.4G with FSB 800MHz
- 100/1000Mbps, 1x RJ-45 Ethernet
- 6x USB2.0/2x COM/1x LPT/1x VGA/1x PS/2
- Special dual door lockable design to prevent mis-operation
- Special adjustable hold-down clamp

Specifications

System		
Processor System	CPU	Intel®(LGA775) Core™2 Duo E4600 2.4G with FSB 800MHz
	Chipset	Intel®945G+ICH7R/Intel®945GC+ICH7
	BIOS	AMI 4M-bit Flash BIOS
Graphic	Chipset	Intel®945G integrated
	Display memory	Dynamic share 224MB system memory
	Display Interface	1x VGA(DB15)
Memory		Optional DDR 400MHz 512MB/1GB/2GB
Ethernet		100/1000Mbps, 1x RJ-45
System I/O	USB Port	6x USB2.0
	Serial port	2x COM
	Parallel port	1x LPT
	PS/2 Port	1x PS/2 Keyboard and mouse connector
	Audio	Line-out, Line-in, MIC-in, CD-in
Storage	HDD	SATA 160/250GB
	ROM	SONY DRU-190A RW-DVD
	FDD	SONY 3.5" 1.44M
Expansion Slot		4x PCI, 7x ISA
System control		Power Switch button, Reset button, Host Switch button, AC Input
System LED Indicators		1x Power LED, 1x HDD LED
Power Support		AC 180-260V 50Hz 300/350W-ATX
System Cooling		2x System cooling FAN, 1x CPU FAN
Mechanical & Environmental		
Operating Temperature		32°F ~140°F (0°C ~60°C)
Storage Temperature		-40°F ~176°F (-40°C ~80°C)
Relative Humidity		5%~95%, 40°C, no condensing
Vibration		1.0g rms/50~500Hz/random operation
EMC		CE/FCC Class B
Dimensions (W×D×H)		19"×18.58"×6.97", 482mm×472mm×177mm
Carton Size (W×D×H)		24.02"×21.65"×13.19", 610mm×550mm×335mm
Net Weight		47.4lb±1lb(21.5kg±0.5kg)
Gross Weight		56.4lb±1lb(25.6kg±0.5kg)
Technics		High temperature surface handling process
Construction		Heavy duty steel
Mounting		Rackmount
Color		beige

Packing List

- **902000009**
Utility Tools Box
- **1201000030**
Keyboard/Mouse
- **0660240009**
Keyboard/Mouse
Y-Shape Cable
- **0120001019**
User's Manual
- **Keys**
- **Filter Foam**
- **Power Cable**
- **Driver CD**
- **Warranty card**
- **HB-2010M**

Ordering Information


- **HB-2010M-V10**
ATX 890+ PBP-13L4+E4600+2GRAM+ST 250G+1.44FDD+
20XDVD+1GCF+PW420

Ordering Information


- **ADK-101-1949015029**
5 to 3 HDD Shock Absorber
- **NORCO-Rails**
Heavy Duty Rackmount Rails

HB-2010M 4U Rackmount 13-Slots Industrial Computer


Front View :

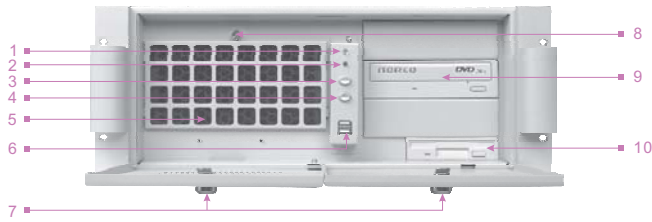

Rear View :

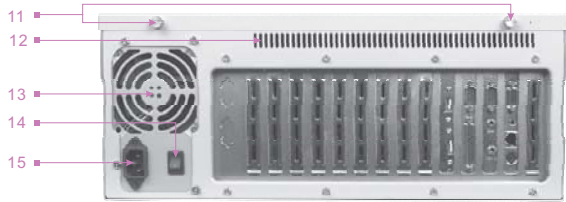

- 1、 Power LED
- 2、 HDD LED
- 3、 Power Button
- 4、 Reset Button
- 5、 Air Filter
- 6、 Dual USB Ports
- 7、 Locker
- 8、 Screw for Filter Cover
- 9、 DVD-ROM
- 10、 Floppy
- 11、 Screw for Top Cover
- 12、 Cooling Hole
- 13、 Power Supply
- 14、 Power Switch
- 15、 Power Socket

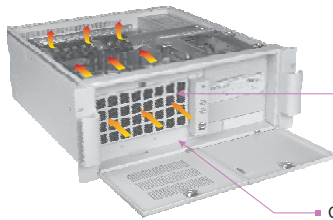

Change Air Filter

Cooling Wind Direction

- Excellent cooling system ensures the drives reliability
- Shock-resistant disk drive bay
- Changeable Air Filter



Step 1: relax screw




Step 2: Pull up the cover




Step 3: Change the Air Filter


Dimensions :

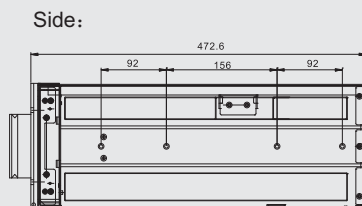


Front:

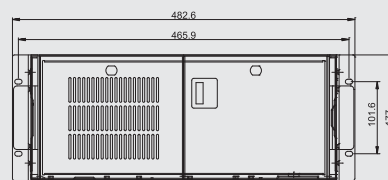

Rear:

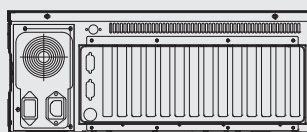

Top:

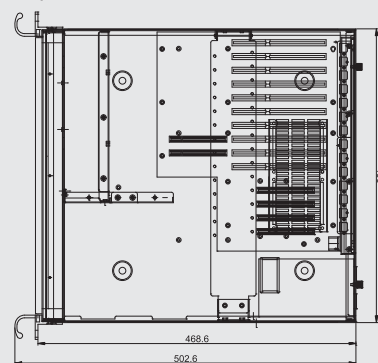

UNITRONIX Pty Ltd

PO Box 486, Morisset NSW 2264

NSW: Tel: 61 2 4977 3511 Fax: 61 2 4977 3522

WA: Tel: 61 8 9455 2424 Fax: 61 8 9455 2458

unitsyd@unitronix.com.au www.unitronix.com.au