

UNITRONIX Pty Ltd

PO Box 486, Morisset NSW 2264

NSW: Tel: 61 2 4977 3511 Fax: 61 2 4977 3522

WA: Tel: 61 8 9455 2424 Fax: 61 8 9455 2458

unitsyd@unitronix.com.au www.unitronix.com.au

* * * * *


* * * * *

General Standards Corporation

High Performance Bus Interface Solutions

PMC64C-HPDI40C2L

High-speed 40-Bit Parallel Digital I/O PCI Board

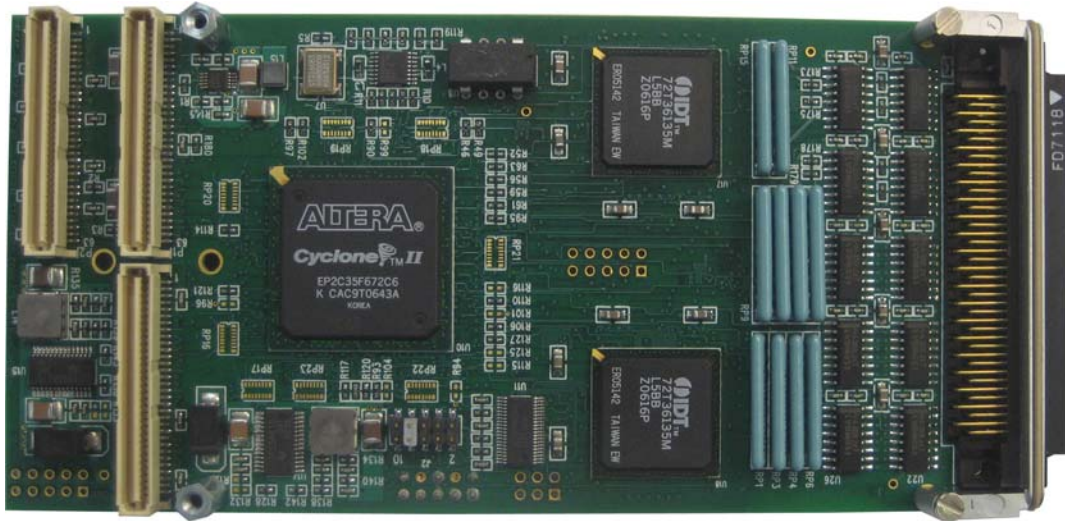

Features Include:

- . 400 Mbytes per second I/O transfer rate via the front panel connector (LVDS transceivers).
- . 400 Mbytes per second PCI transfer rate in burst mode (64bit 66MHz).
- . Can interface to a wide variety of external high-speed devices.
- . "Deep FIFO buffers" (4 Megabytes) allow data bursts to be transferred over the PCI bus.
- . 64-Bit data transfers on the PCI bus.
- . On-board cable controller, FIFOs, and DMA engine provide for continuous data transfer.
- . Data input/output clock rate up to 100 MHz.
- . 64-Bit, 66MHz PCI v2.2 compliant.
- . "Program-and-forget" DMA engine handles Direct DMA and Scatter Gather DMA transfers.
- . Cable data input/output width of 32 bits.
- . 8 bi-directional signals can be used as clocks and/or handshaking protocol.

General Standards Corporation

8302A Whitesburg Drive - Huntsville, AL 35802

Phone: (256)880-8787 or (800)653-9970

FAX: (256)880-8788

Email: sales@generalstandards.com

* * * * * COMING SOON! * * * * *